



SRINIVASA INTERNATIONAL
Home Solutions



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

NEW



Glazed Vitrifide Tiles

Surface: Carving

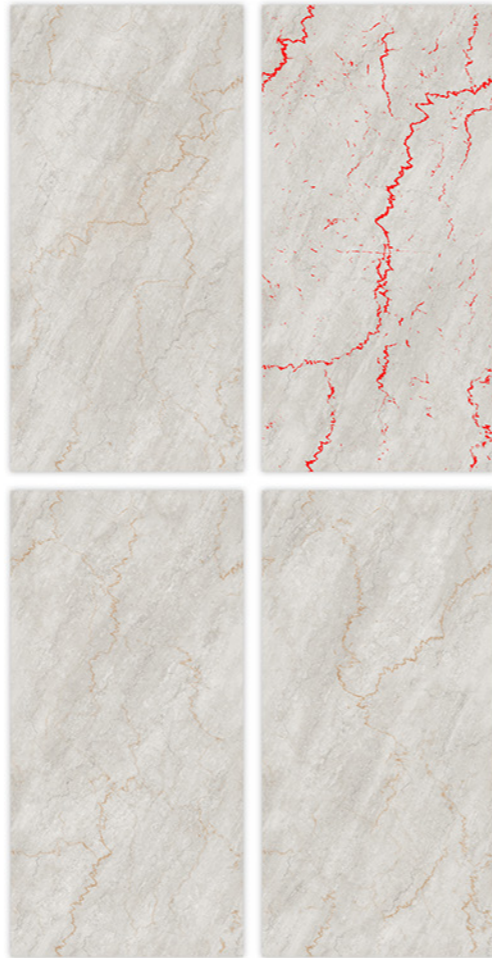

BOTTOCHINO ROYAL GREY (END)

600X600MM | 600X1200MM

NEW



Surface: Carving



CHIARA ASH (END)

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT

NEW



Glazed Vitrifide Tiles

Surface: Carving



CHIARA BEIGE(END)

600X600MM | 600X1200MM

NEW



Surface: Carving



CHIARA BIANCO (END)

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions

NEW



Glazed Vitrifide Tiles


Surface: Carving

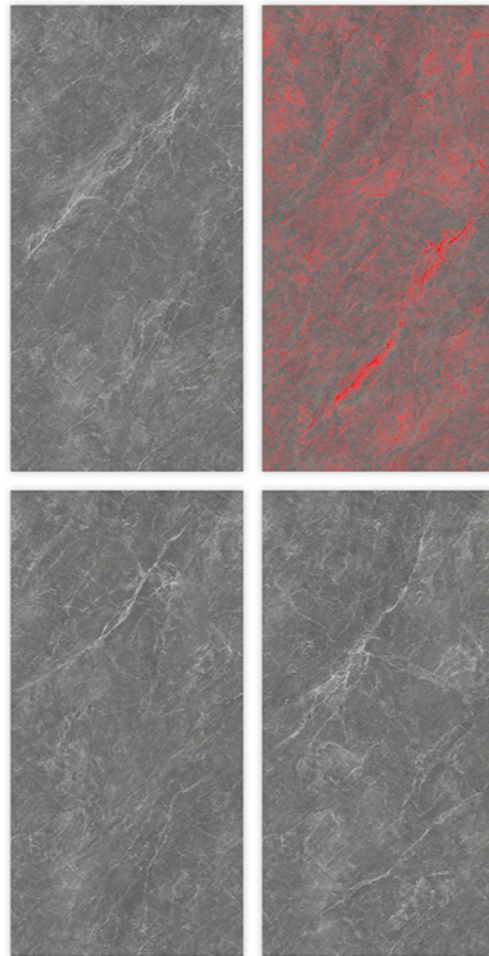


CHIARA COAL (END)

600X600MM | 600X1200MM

NEW

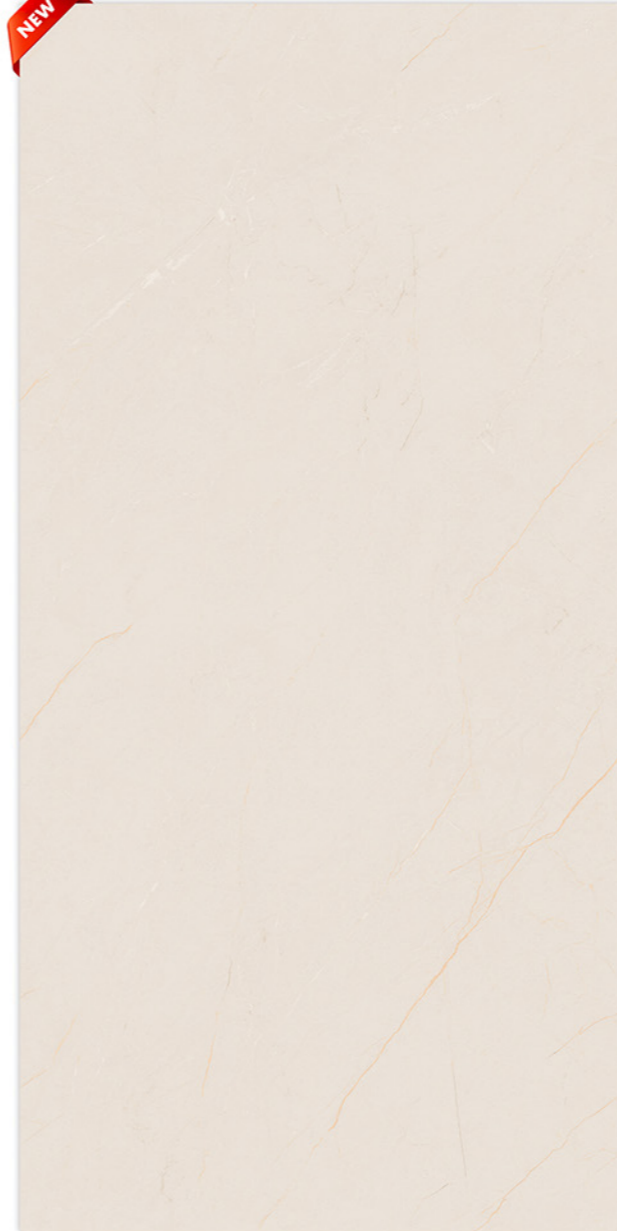

Surface: Carving

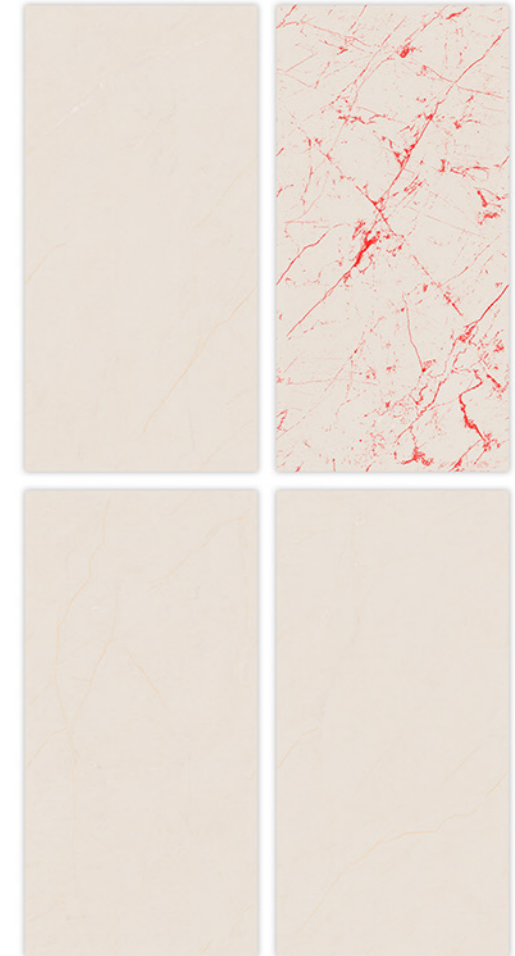

CIVIC BEIGE (END)

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

NEW



Glazed Vitrified Tiles

Surface: Carving

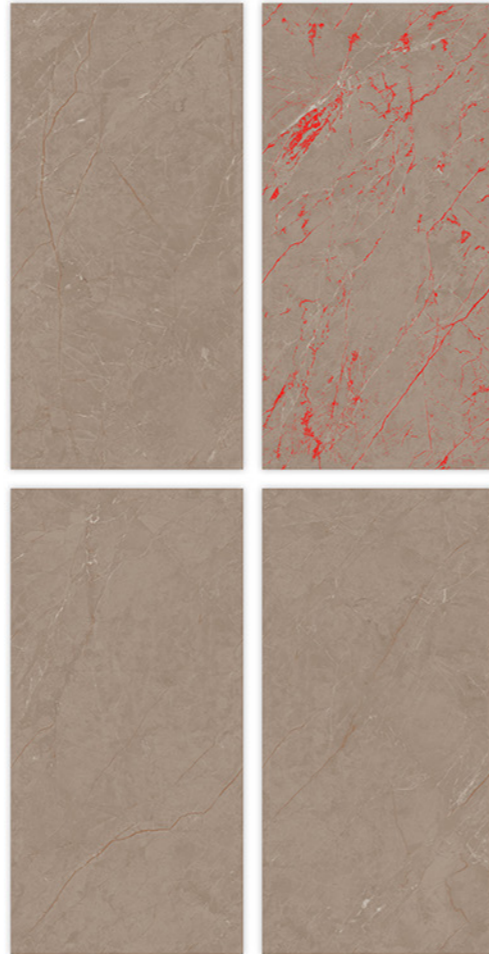


CIVIC BROWN (END)

600X600MM | 600X1200MM

NEW



Surface: Carving

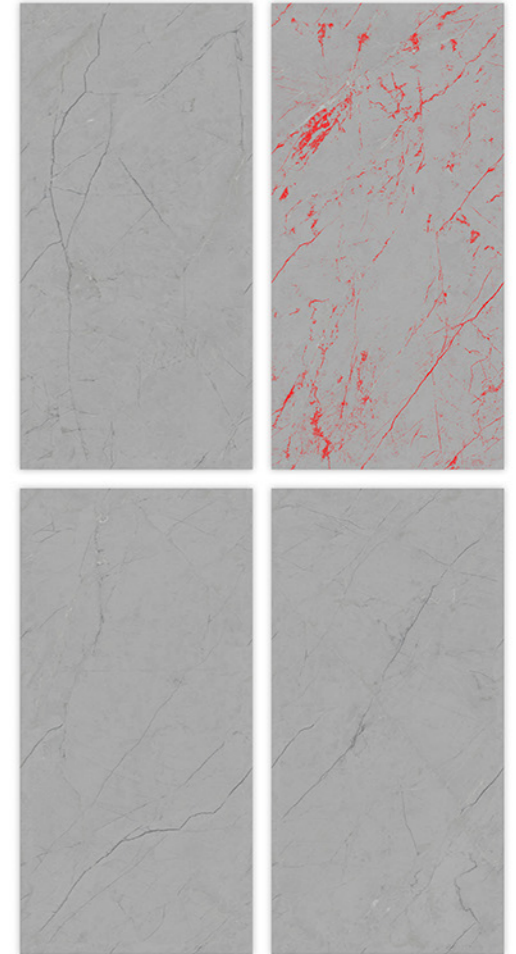

CIVIC GREY (END)

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

NEW



Glazed Vitrified Tiles

Surface: Carving

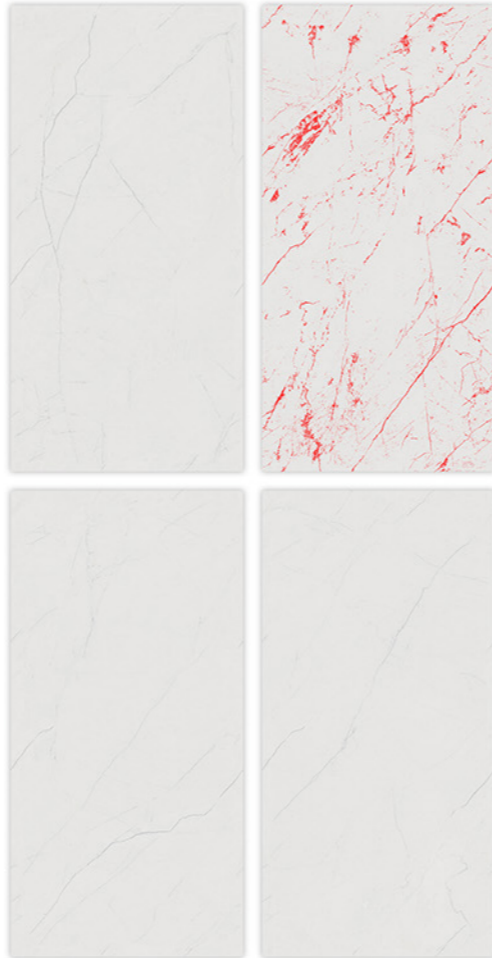


CIVIC SILVER (END)

600X600MM | 600X1200MM

NEW



Surface: Carving

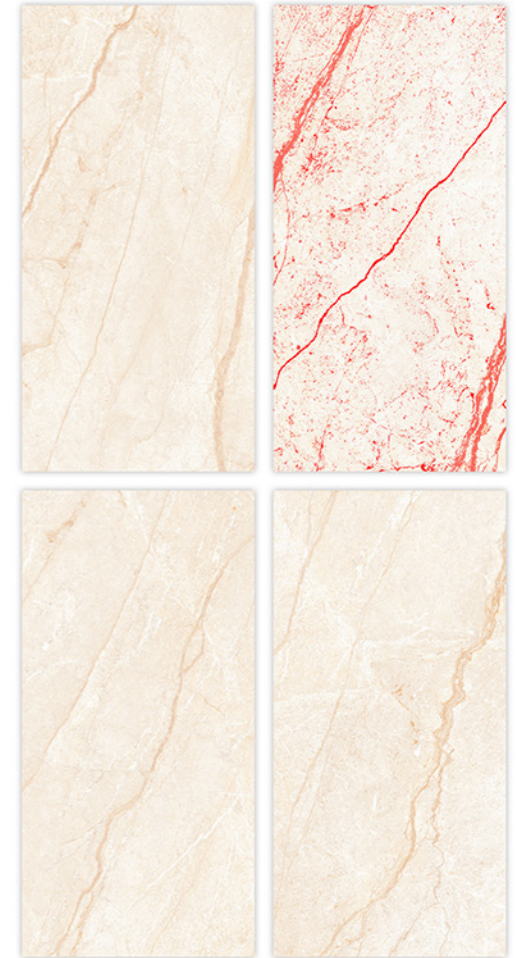

CV-240

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

NEW



Glazed Vitrifide Tiles

Surface: Carving

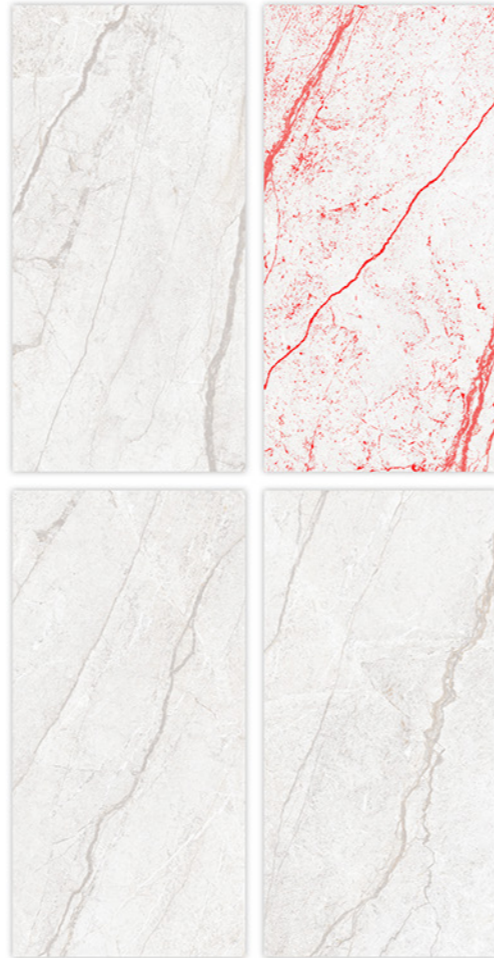


CV-241

600X600MM | 600X1200MM

NEW



Surface: Carving

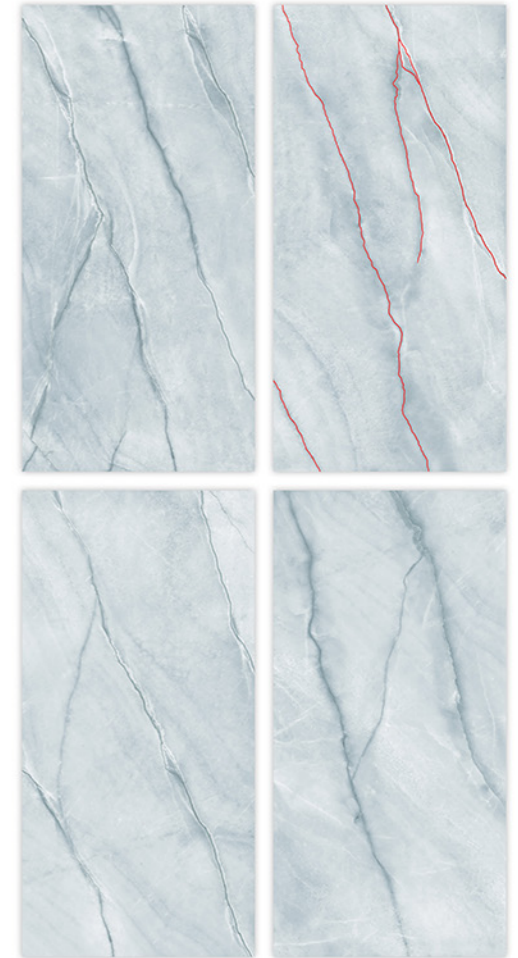

CV-242

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

NEW



Glazed Vitrified Tiles

Surface: Carving

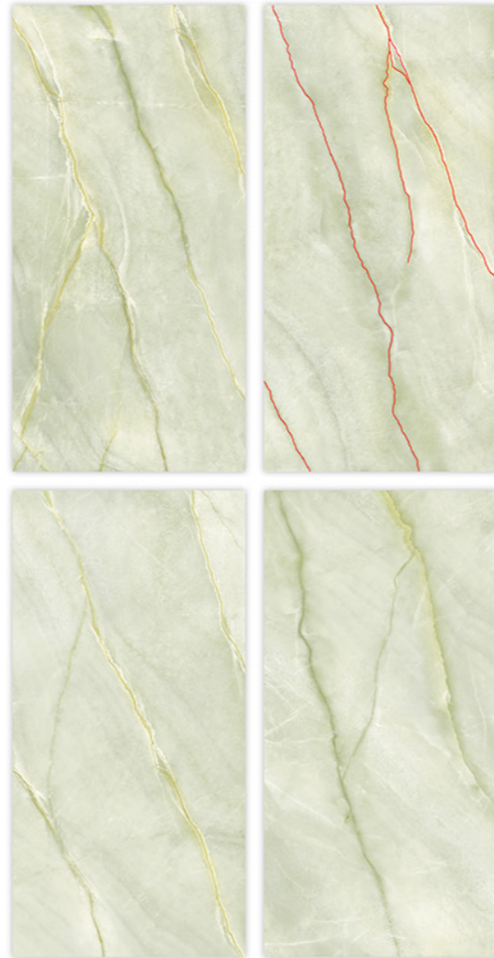

CV-243

600X600MM | 600X1200MM

NEW



Surface: Carving



CV-244

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT

NEW



Glazed Vitrified Tiles

Surface: Carving




CV-245

600X600MM | 600X1200MM

NEW



Surface: Carving

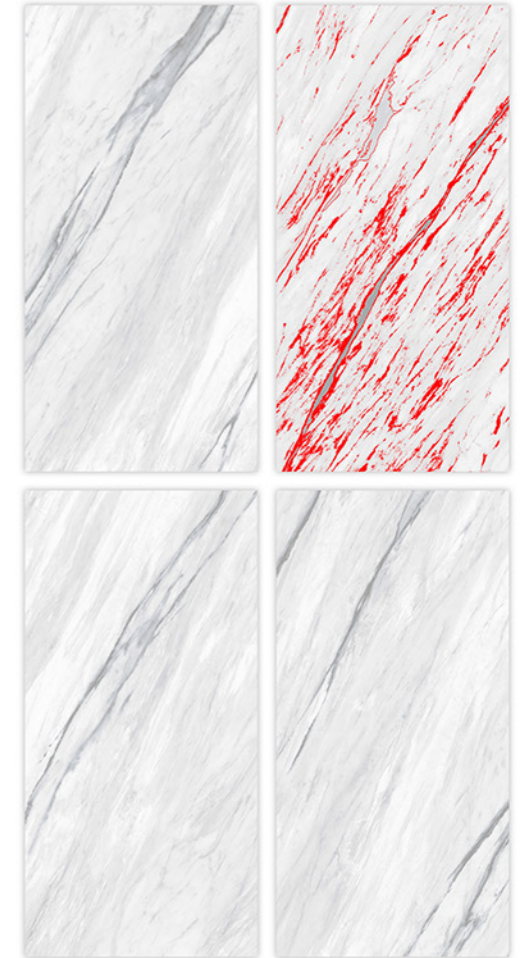

CV-246

600X600MM | 600X1200MM



SRINIVASA INTERNATIONAL
Home Solutions



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY




TAILORED DESIGN



WATER RESISTANT

NEW

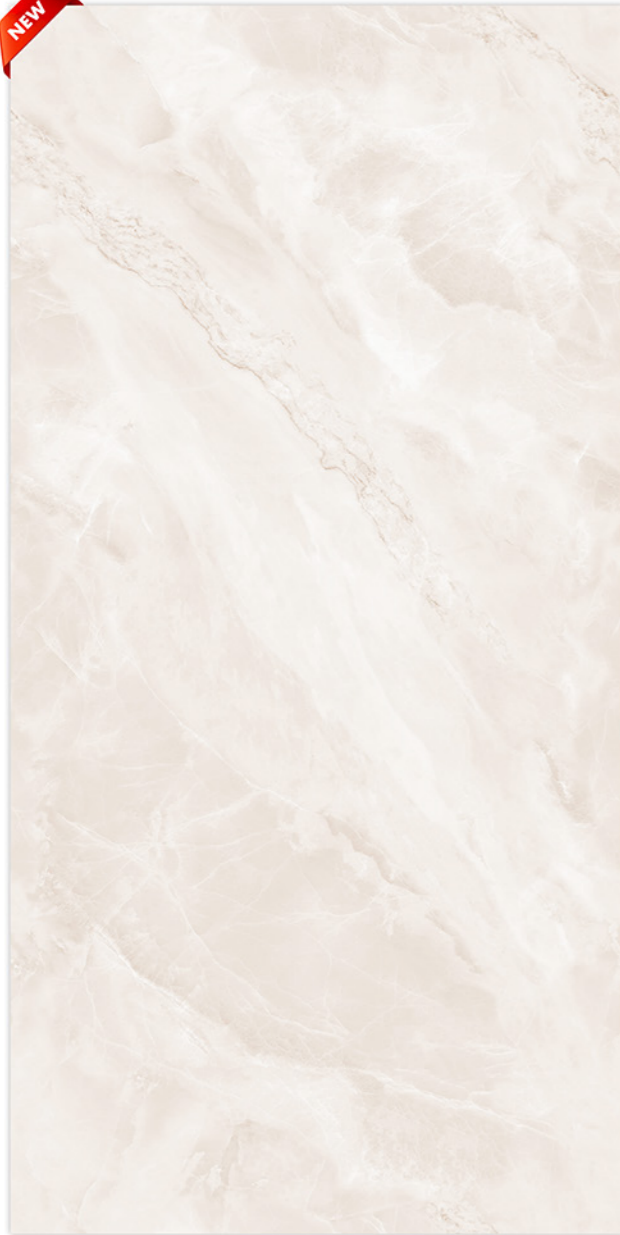

Glazed Vitrifide Tiles


Surface: Carving




TWILIGHT BEIGE (END)

600X600MM | 600X1200MM

NEW

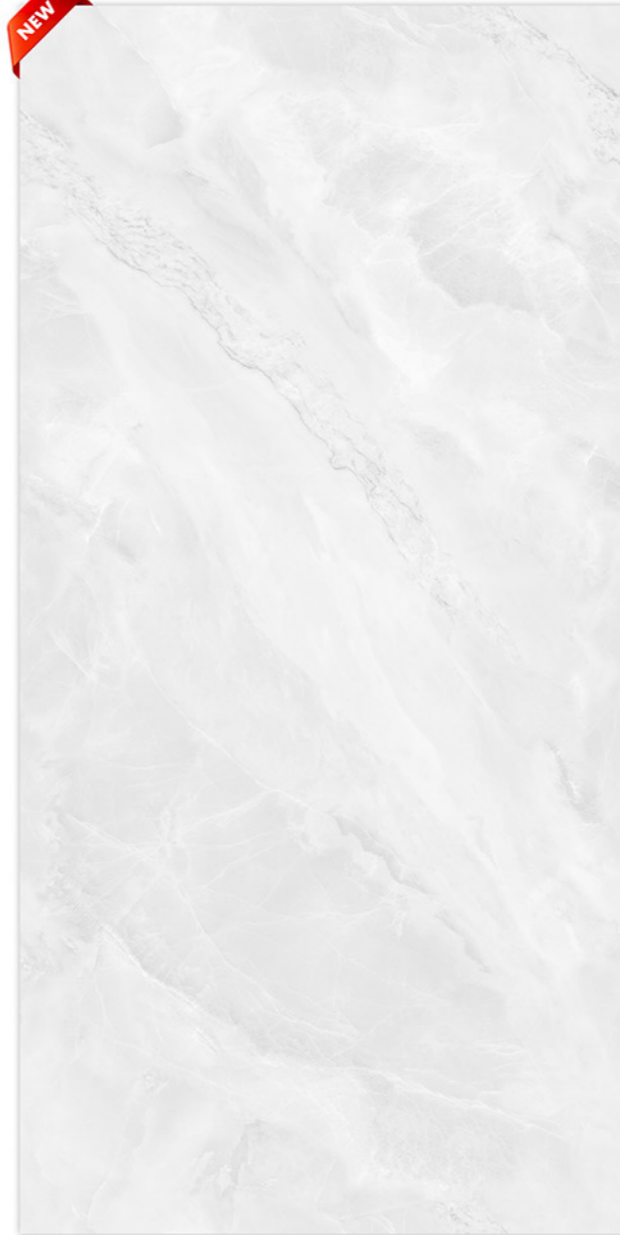

Surface: Carving

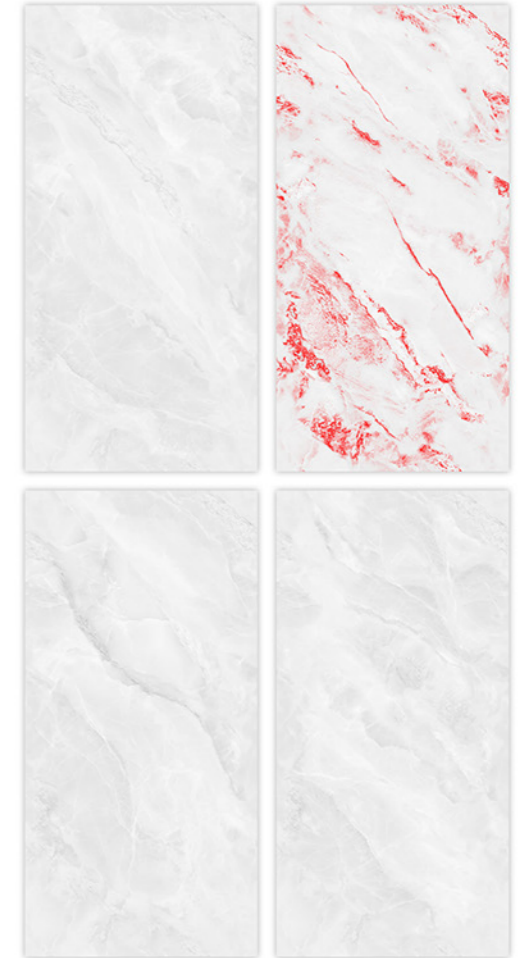

TWILIGHT BIANCO (END)

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

NEW



Glazed Vitrifide Tiles

Surface: Carving

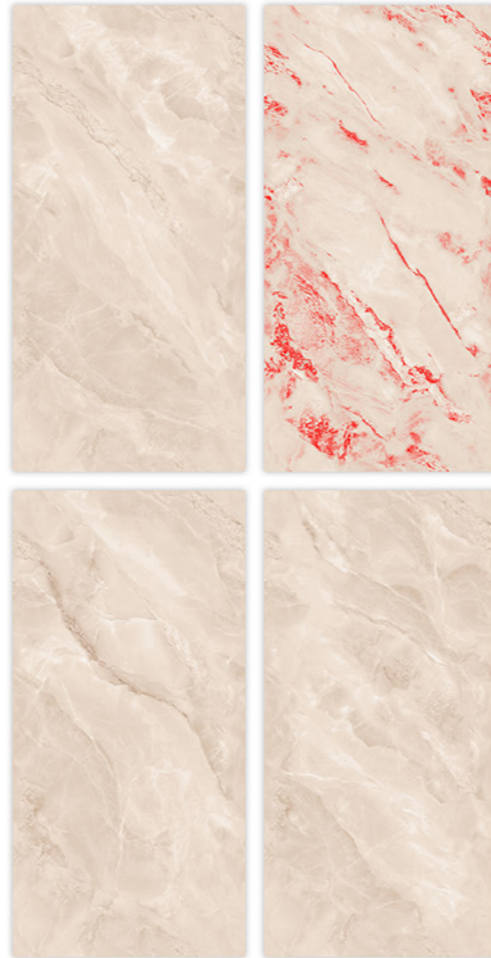


TWILIGHT CAMEL (END)

600X600MM | 600X1200MM

NEW



Surface: Carving

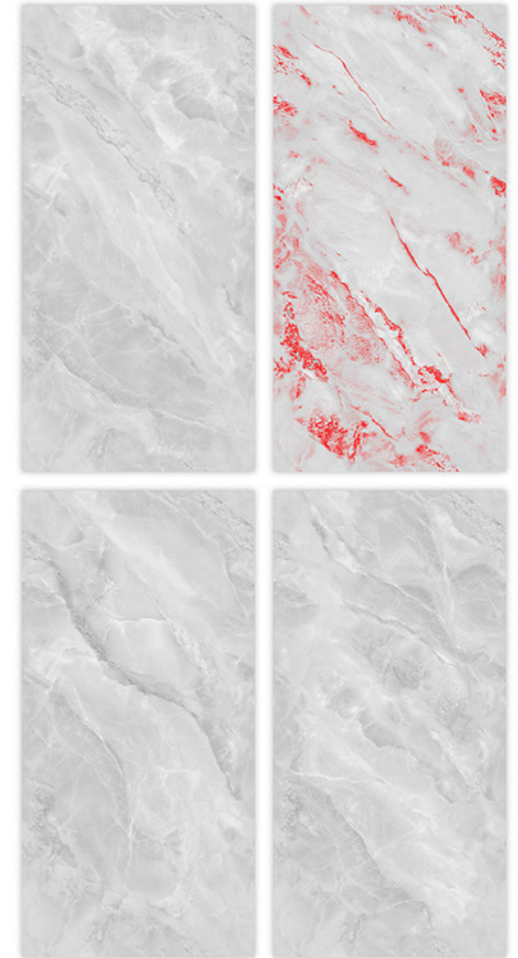

TWILIGHT GREY (END)

600X600MM | 600X1200MM



TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 Bla TILES	VALUE
Length and width	BS EN ISO 10545-2	±0.6%	±0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	±3.0%
Straightness of sides	BS EN ISO 10545-2	±0.5%	±0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	±0.3%
Surface flatness	BS EN ISO 10545-2	±0.5%	±0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45N/mm ²
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
Linear thermal expansion	BS EN ISO 10545-8	≤9 x 10 ⁻⁸ °C ⁻¹	≤9 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil

SPECIFICATION

Size	Pcs/Box	Weight (Approx)	Thickness (Approx)	SQ. / Box
60X120cm	2	27.5kg	8.5mm	1.44
60X60cm	4	26kg	8mm	1.44



SRINIVASA INTERNATIONAL

Home Solutions

📍 **Vishal Bhai**

+91 9512398989

📍 **Ramakrishna Bhai**

+91 9033394949

SRINIVASA INTERNATIONAL

📍 LUXURIA BUSINESS PARK, 320, Third floor,
Mahendra Nagar, Morbi - 363642. (guj.) INDIA

✉ E-mail:- SRINIVASAINTERNATIONAL2@gmail.com