



SRINIVASA INTERNATIONAL
Home Solutions



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions

NEW



Glazed Vitrifide Tiles

Surface: Glossy

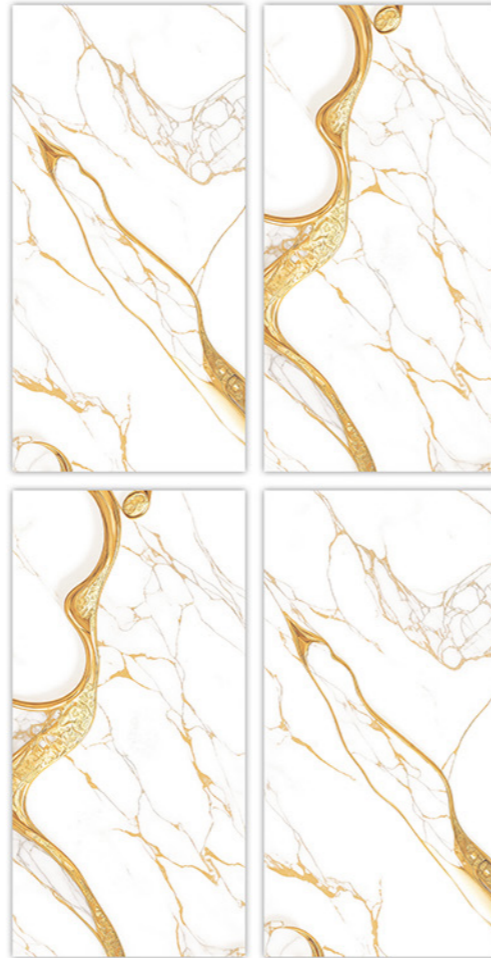


GD-3001

600X600MM | 600X1200MM

NEW



Surface: Glossy

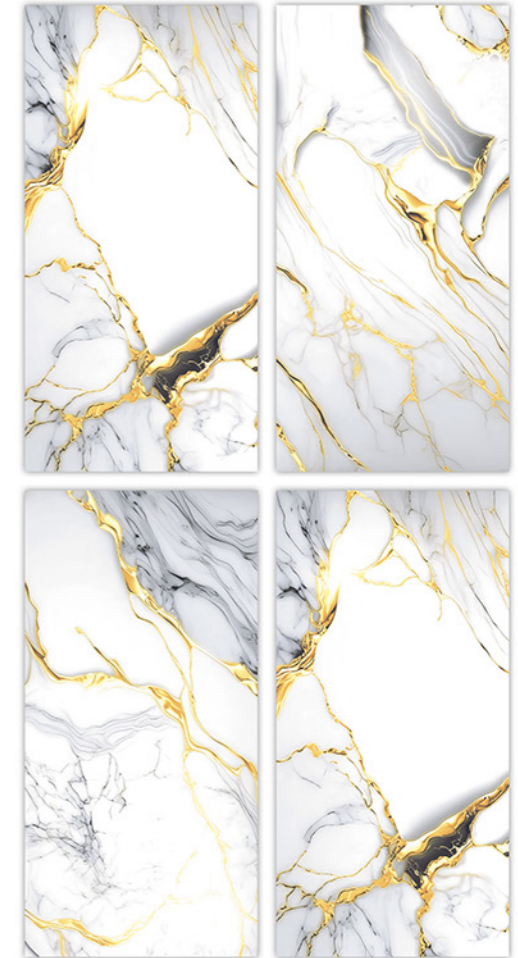

GD-3002

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions




Glazed Vitrifide Tiles

Surface: Glossy

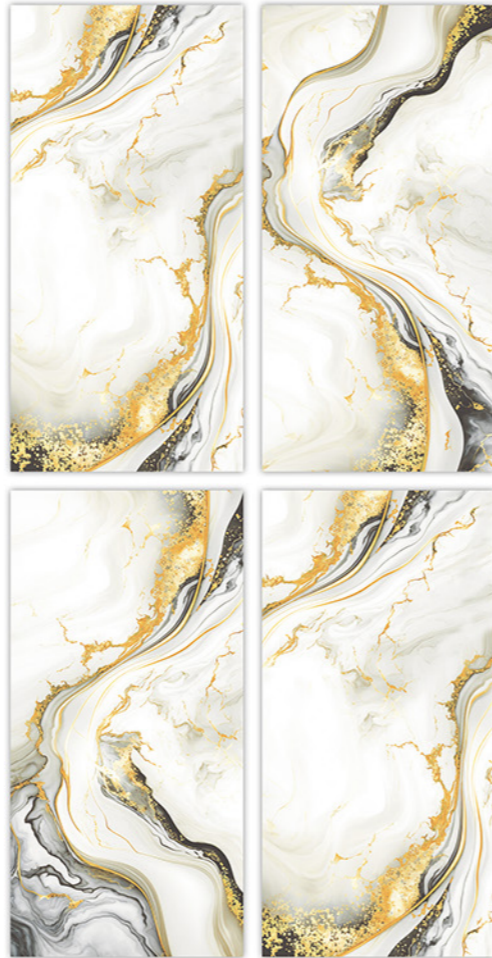


GD-3003

600X600MM | 600X1200MM

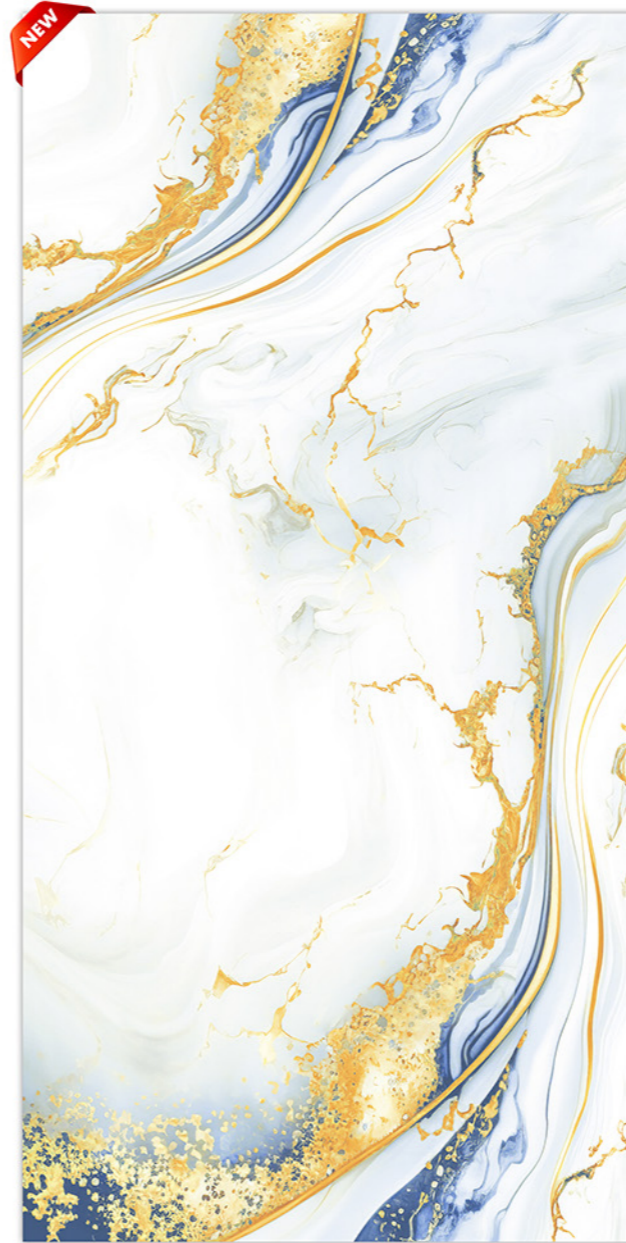

Surface: Glossy

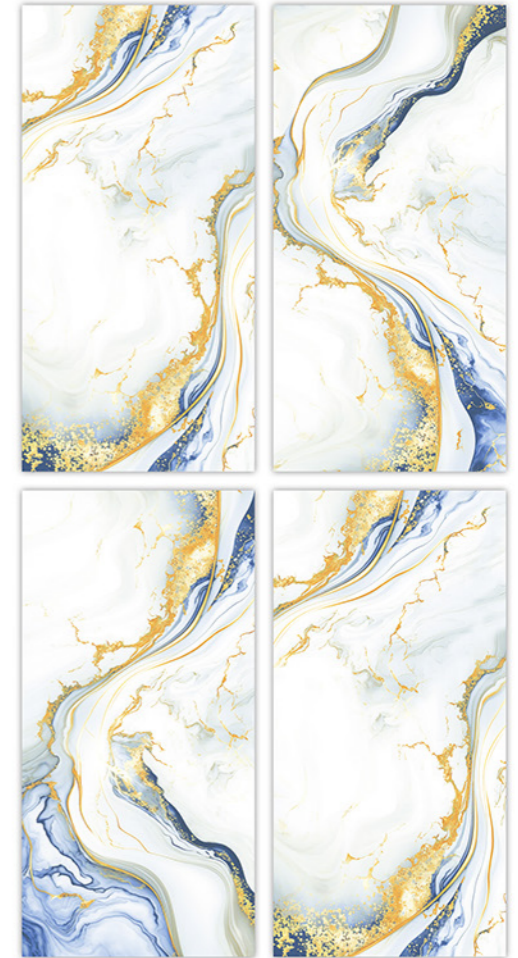

GD-3004

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions




Glazed Vitrifide Tiles

Surface: Glossy

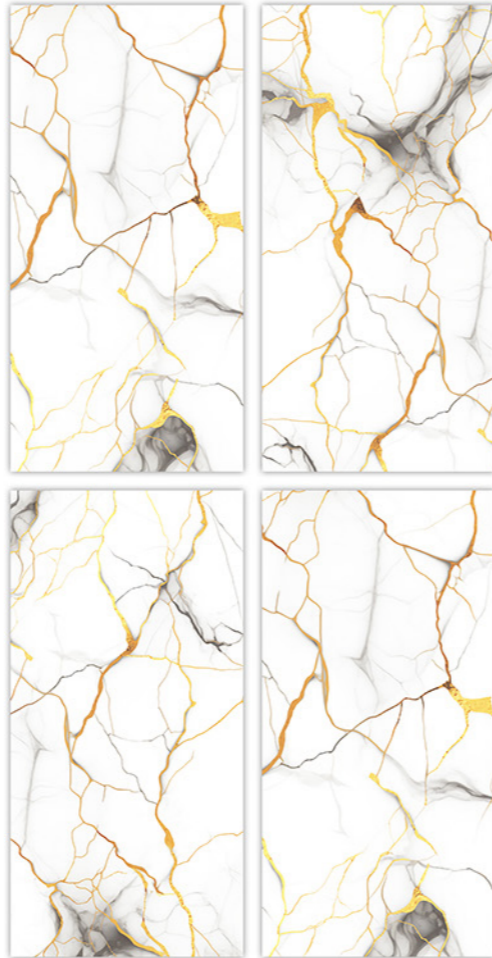


GD-3005

600X600MM | 600X1200MM

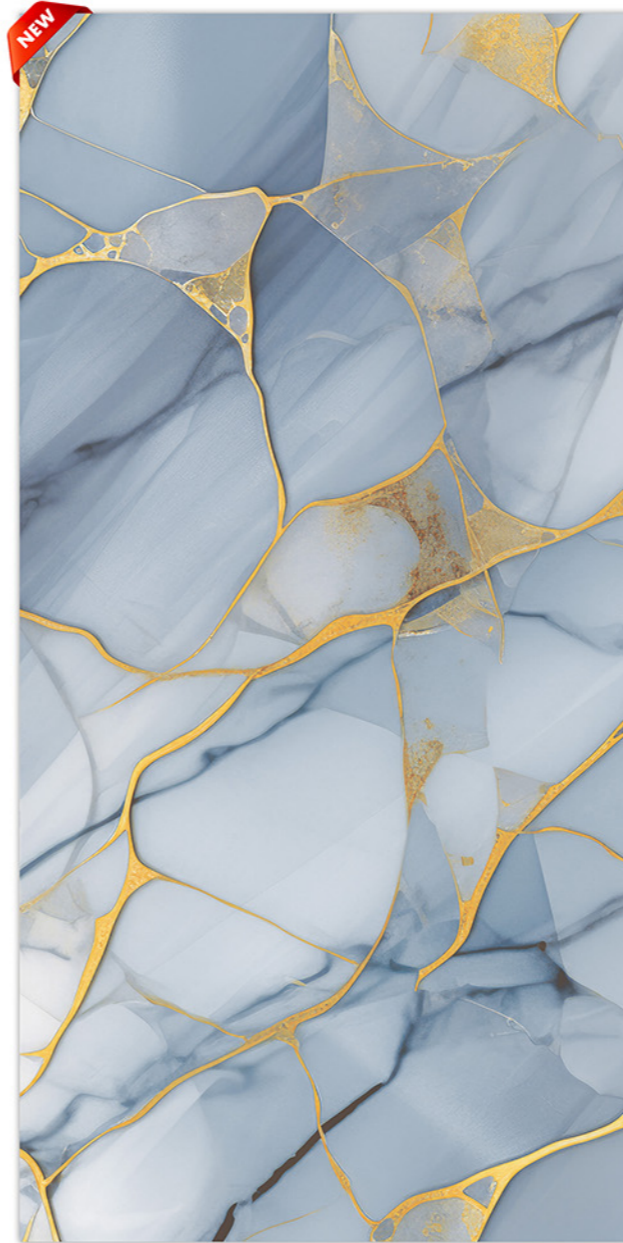

Surface: Glossy

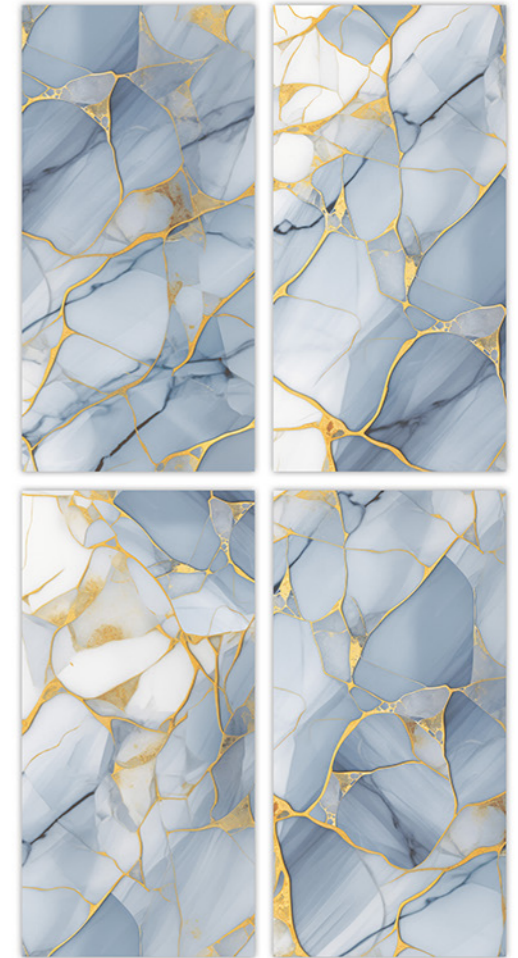

GD-3006

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT



SRINIVASA INTERNATIONAL
Home Solutions



Glazed Vitrifide Tiles

Surface: Glossy



GD-3007

600X600MM | 600X1200MM



Surface: Glossy



GD-3008

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions

NEW



Glazed Vitrifide Tiles

Surface: Glossy

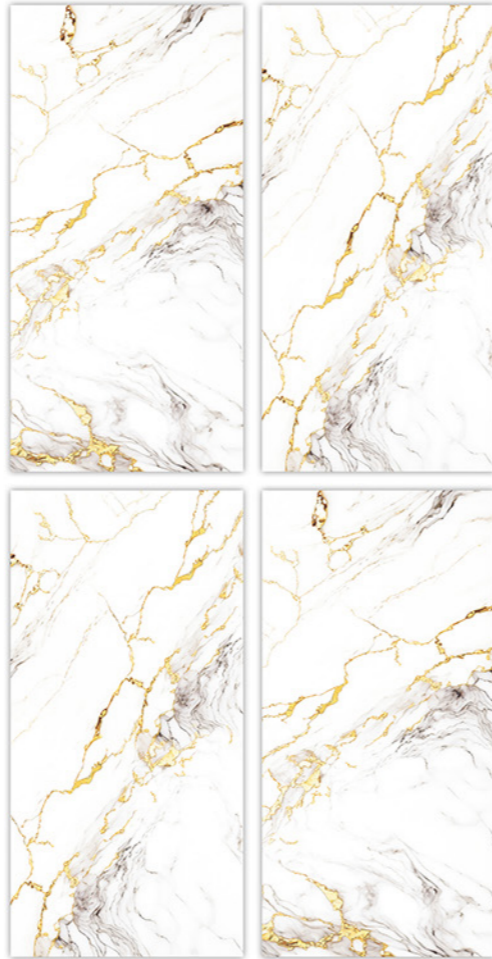


GD-3009

600X600MM | 600X1200MM

NEW



Surface: Glossy

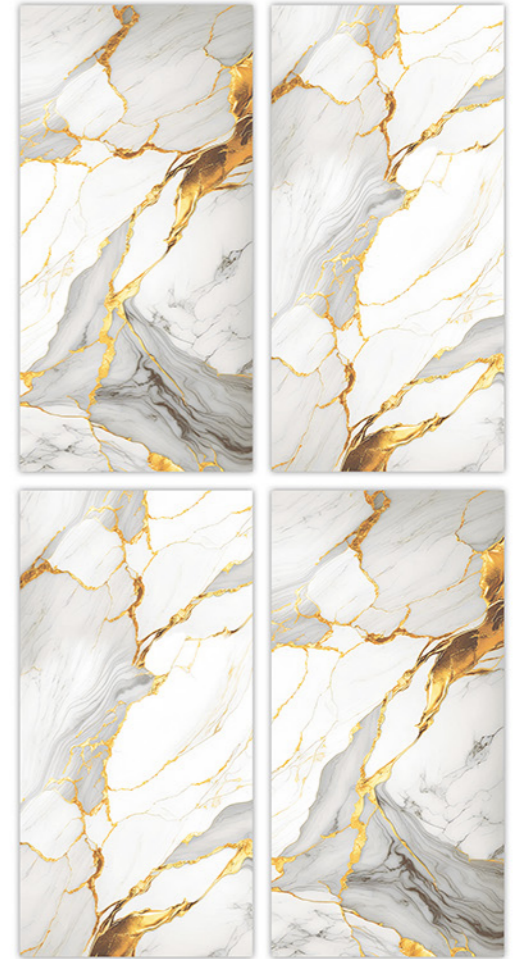

GD-3010

600X600MM | 600X1200MM



SRINIVASA INTERNATIONAL
Home Solutions



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN




COLOR STABILITY



TAILORED DESIGN




WATER RESISTANT

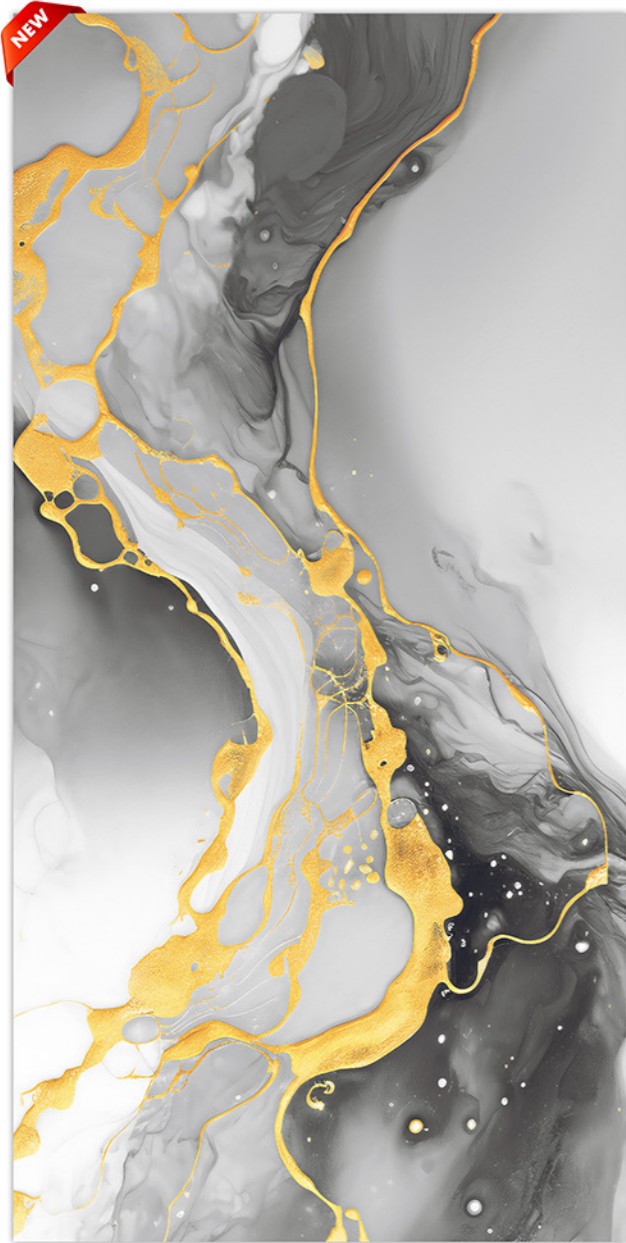


Glazed Vitrifide Tiles

Surface: Glossy

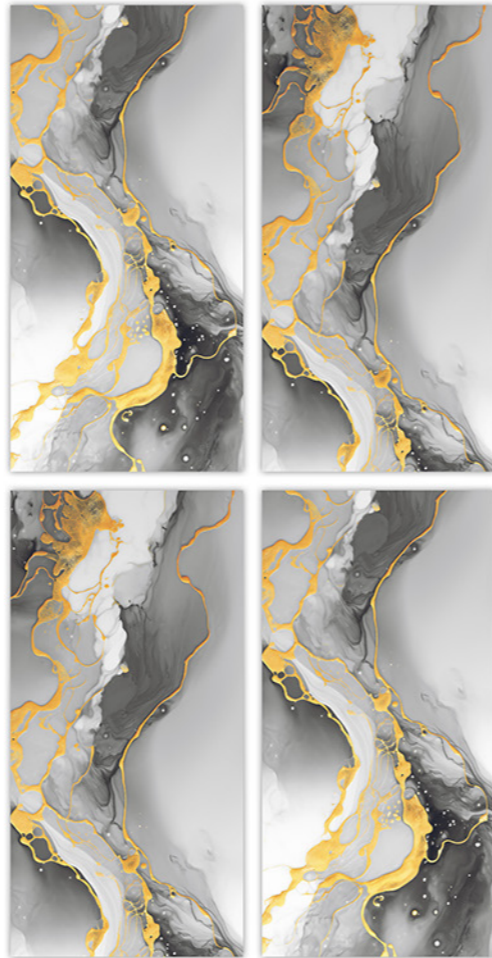

GD-3011

600X600MM | 600X1200MM

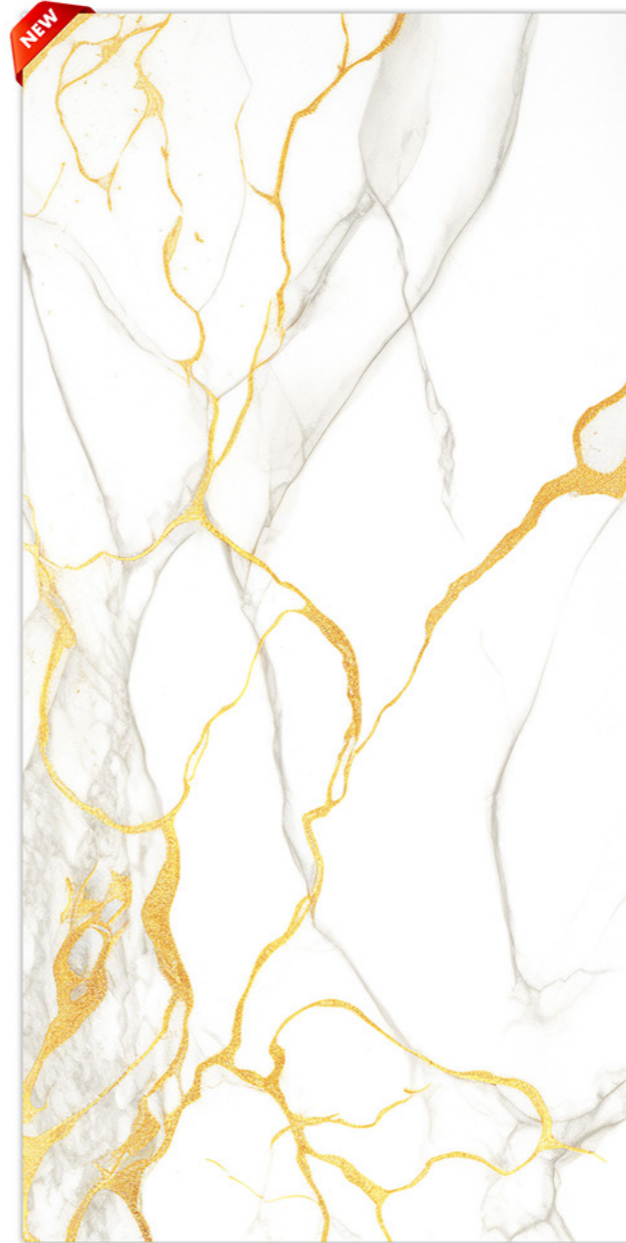

Surface: Glossy



GD-3012

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions

NEW



Glazed Vitrifide Tiles

Surface: Glossy

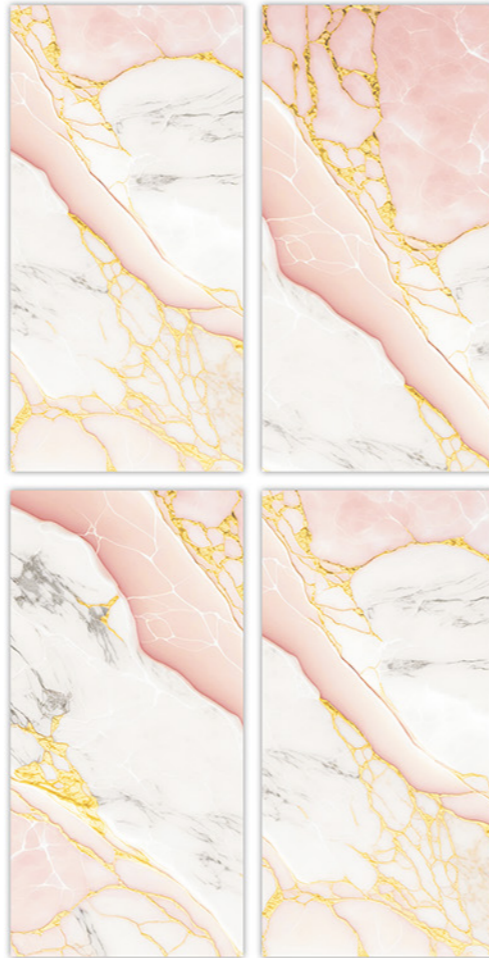


GD-3013

600X600MM | 600X1200MM

NEW



Surface: Glossy

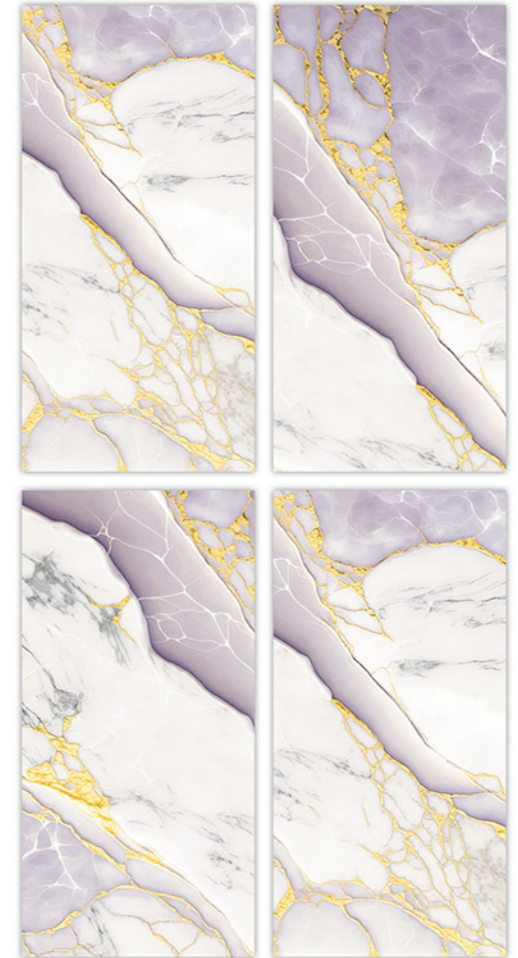

GD-3014

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions



Glazed Vitrifide Tiles

Surface: Glossy

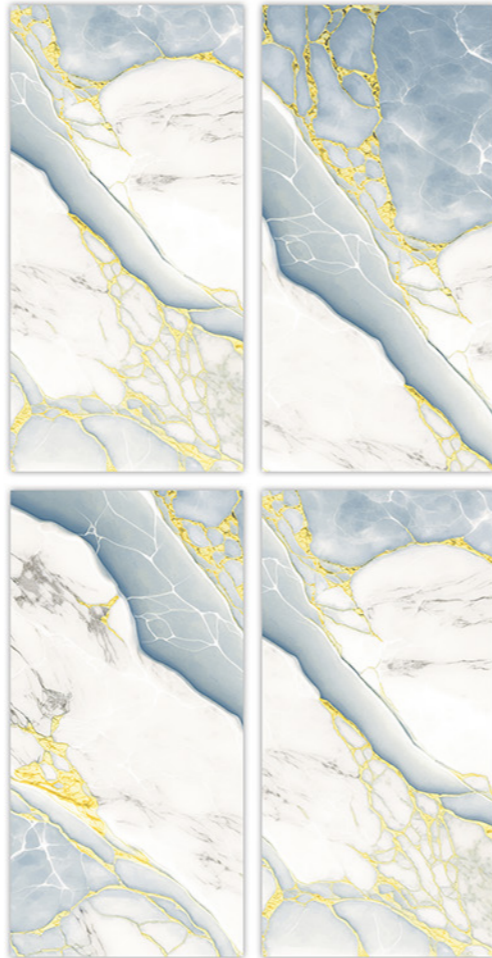


GD-3015

600X600MM | 600X1200MM



Surface: Glossy

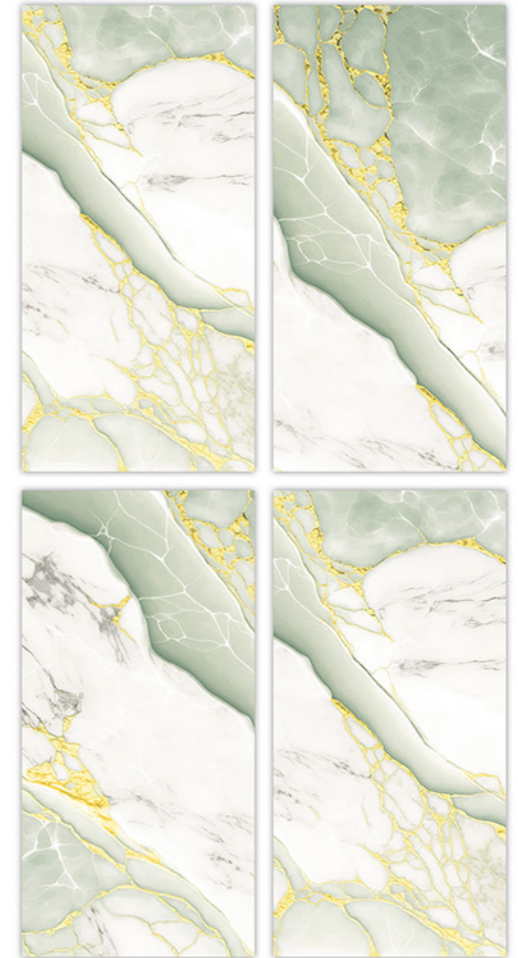

GD-3016

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions




Glazed Vitrifide Tiles

Surface: Glossy

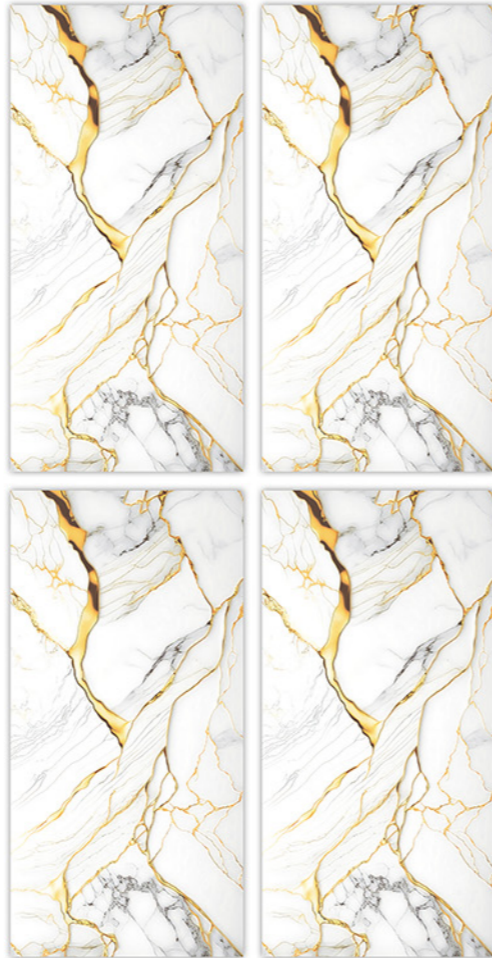


GD-3017

600X600MM | 600X1200MM

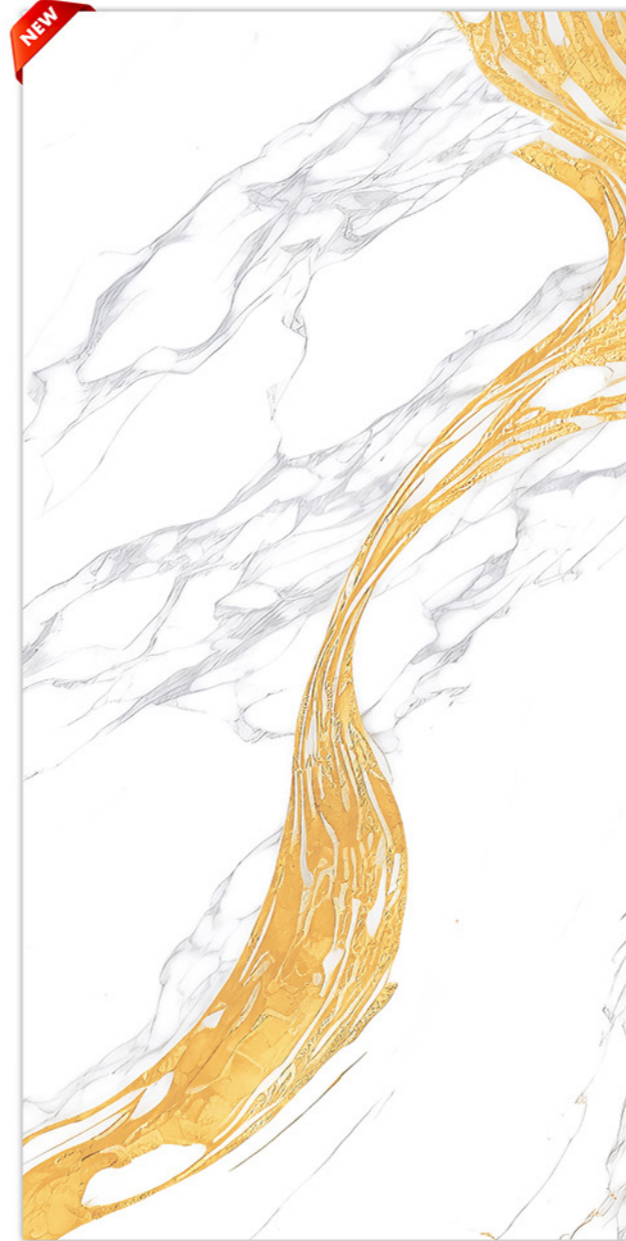

Surface: Glossy

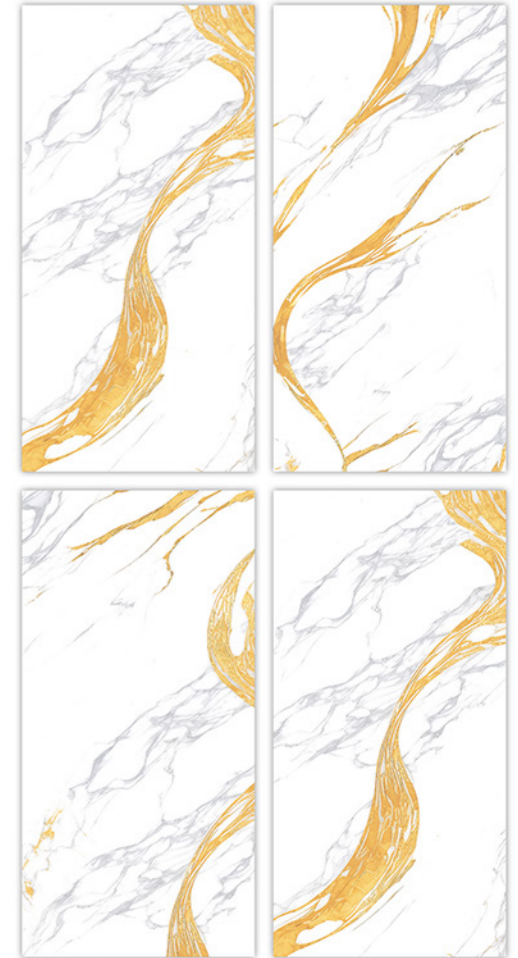

GD-3018

600X600MM | 600X1200MM



SCRATCH & IMPACT RESISTANT



DIMENSIONAL STABILITY



UNALTERABLE TO UV RAYS



RESISTANT TO STAINS



EASY TO CLEAN



COLOR STABILITY



TAILORED DESIGN



WATER RESISTANT




SRINIVASA INTERNATIONAL
Home Solutions

NEW



Glazed Vitrifide Tiles

Surface: Glossy

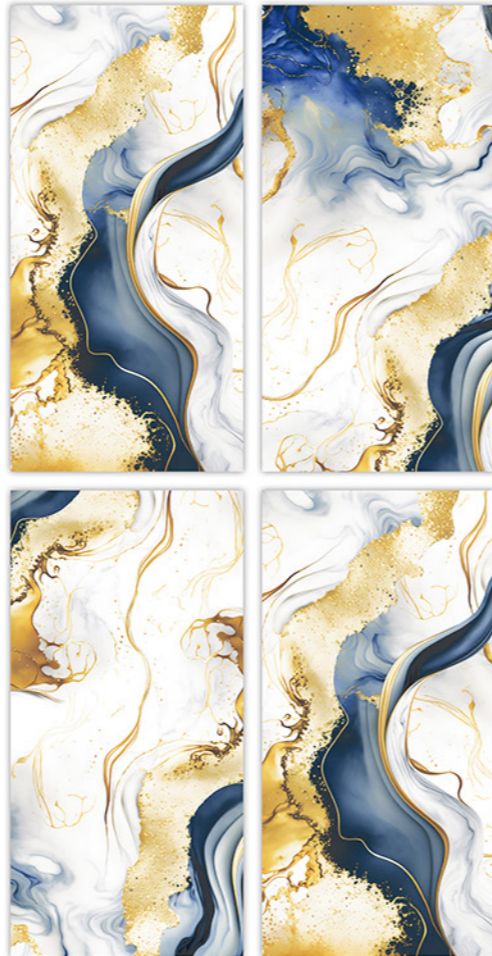

GD-3019

600X600MM | 600X1200MM



TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 Bla TILES	VALUE
Length and width	BS EN ISO 10545-2	±0.6%	±0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	±3.0%
Straightness of sides	BS EN ISO 10545-2	±0.5%	±0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	±0.3%
Surface flatness	BS EN ISO 10545-2	±0.5%	±0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45N/mm ²
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
Linear thermal expansion	BS EN ISO 10545-8	≤9 x 10 ⁻⁸ °C ⁻¹	≤9 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil

SPECIFICATION

Size	Pcs/Box	Weight (Approx)	Thickness (Approx)	SQ. / Box
60X120cm	2	27.5kg	8.5mm	1.44
60X60cm	4	26kg	8mm	1.44



SRINIVASA INTERNATIONAL

Home Solutions

📞 **Vishal Bhai**

+91 9512398989

📞 **Ramakrishna Bhai**

+91 9033394949

SRINIVASA INTERNATIONAL

📍 LUXURIA BUSINESS PARK, 320, Third floor,
Mahendra Nagar, Morbi - 363642. (guj.) INDIA

✉ E-mail:- SRINIVASAINTERNATIONAL2@gmail.com